


123 - Spider Plus


5.1

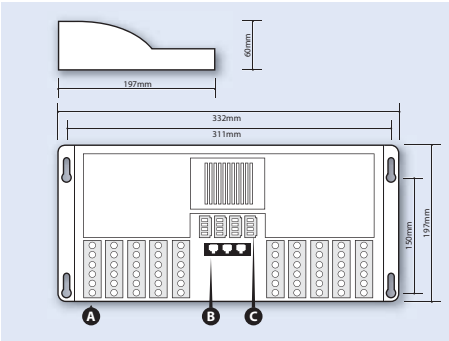

123 Spider Plus, has been designed as a flexible lighting distribution and control box, which can give connection to 10 lighting ports using industry standard connectivity, with three independent relays capable of switch and dimming via ELV switching or Passive and Microwave sensing technology.

The unit can also provide Emergency test facility. Standard control options give:

- Presence detection
- Absence detection
- Daylight linking
- Manual dimming
- Corridor hold
- Emergency testing

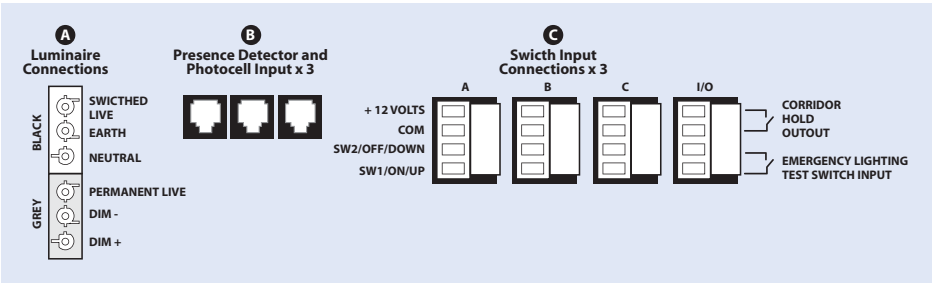

Supply Voltage: **220-240V AC 50 Hz**
 Terminal Capacity: **4.0mm²**
 Material: **Flame retardant nylon and ABS**

Type: **Class 2**
 Temperature: **-10°C to 35°C**
 Conformity: **LVD-73/23/EEC**

Tel: +44 (0)1252 470027
www.the-is.co.uk

Specification subject to change without notice

The IS Limited
 The Intelligent Solution