


# Rapid LMS


2.7

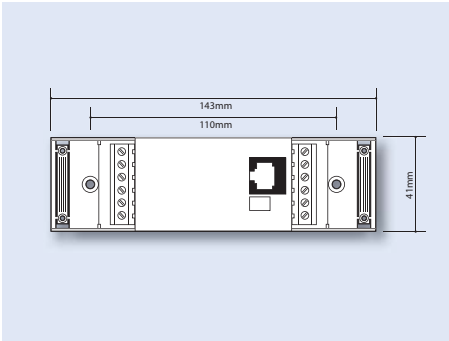

The LMS-MIN-LCM series of lighting control modules (LCMs) are used as part of the LMS Lighting Management System to switch lighting. They have a single addressable output. For emergency test applications which require centralised testing or ELV switch connections, the LMS-MIN-LCM-EM provides a switched permanent live output. Incorporated on the unit is a two channel interface for connection to external devices such as light switches, emergency test switches and time clocks. A port on the front enables the LCM to be connected to peripherals such as presence detectors and bus repeaters, and two terminals allow connection to the LMS bus.

### Features include:

- Power for up to 4 peripherals
- Adjustable off delays and group delays
- Adjustable start up lighting levels
- Scene control
- Bus and activity LEDs
- Dimming by either DSI/DALI

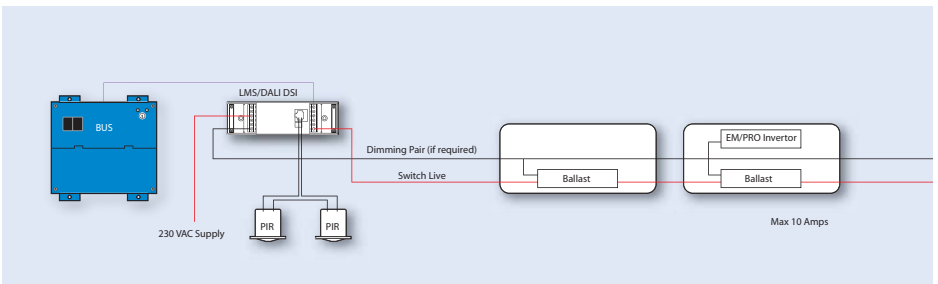

Supply voltage: **230 V AC 50Hz**  
Type: **Class 2**

Terminal capacity: **2.5mm<sup>2</sup>**  
Temp: **-10 °C to 35 °C**

Material: Flame **Flame retardant ABS**  
Max Load: **10 amp switch & DSI/DALI**

Tel: +44 (0)1252 470027  
[www.the-is.co.uk](http://www.the-is.co.uk)

Specification subject to change without notice

*The IS Limited*  
The Intelligent Solution